

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)*(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
3517-44Total Pages in this Submission
55**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

PRINT SYSTEM CAPABLE OF INFORM USER OF PROGRESS OF PRINT OPERATIONS

and invented by:

Keiji MIYAKE and
Kiyoji MURAMATSUJc549 U.S. PTO
09/383754
08/26/99If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having thirty-four pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
3517-44

Total Pages in this Submission
55

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets ten
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EJ339414562US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
3517-44

Total Pages in this Submission
55

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	19	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) <u>Assignment</u>					\$40.00
TOTAL FILING FEE					\$956.00

- ☒ A check in the amount of **\$956.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **11-0215** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Dated: August 26, 1999

Gerald Levy, Esq.
Registration No. 24,419
Kane, Dalsimer, Sullivan, Kurucz,
Levy, Eisele and Richard, LLP
711 Third Avenue
New York, NY 10017
212-687-6000

cc:

**PRINT SYSTEM CAPABLE OF INFORM USER OF
PROGRESS OF PRINT OPERATIONS**

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to a print system capable of notifying a user of progress of print operations.

2. Description of the Related Art

 There has been known a conventional print system including an information processing terminal for generating original data, a printer controller for converting the
10 original data into print data, and a printer for executing print operations based on the print data.

 Specifically, the information processing terminal generates original data. The original data may be data in a
15 page description language (PDL), such as PostScript, or image data, such as Tagged Image File Format (TIFF) image data, Joint Photographic coding Experts Group (JPEG) image data. Because the original data cannot be processed by the printer, the printer controller, such as a raster image
20 processor (RIP), converts the original data into print data which can be processed by the printer. The print data is then transmitted to the printer, and temporarily stored in a buffer memory or a storage device of the printer. The printer performs print operations based on the print data
25 for forming images on a recording medium.

 Because of a limited capacity of the buffer memory,

not all print data can be stored in the buffer memory at once. Therefore, after the print operations are performed based on print data stored in the buffer memory, the print data is cleared from the buffer memory, thereby generating free space in the buffer memory. Then, subsequent print data is received and stored in the buffer memory. This pattern is repeated until all print data is transmitted from the printer controller.

In a small print system, the printer controller is provided internally of the information processing terminal. However, in large scale print systems, such as a computer network with a larger printer capable of printing banners several meters long, the printer controller is provided as a separate device from the information processing terminal in order to lighten the processing burden on the information processing terminal. In this case, the printer controller is connected between the information processing terminal and the printer. In both cases, the printer controller receives all original data from the information processing terminal over the network at one time, converts the received original data into print data, and transmits the print data to the printer a portion at a time in a plurality of steps.

The print systems described above determine the progress of print operations being performed by the printer and notify the user. This determination is made based on

the amount of print data that remains in the printer controller, untransmitted to the printer. However, the progress of print operations at the printer is not directly related to the amount of the untransmitted print data. For example, print data can remain unprinted in the printer, even if all the print data is transmitted from the printer controller to the printer. However, when the printer controller completely transmits all print data to the printer, then the user will be notified that printing operations have been completed even if unprinted print data still remains in the buffer memory of the printer. In this way, the progress of print operations can not be accurately notified.

Moreover, the printer may be required to stop print operations for some reasons even when the printer retains some unprinted print data. The user cannot accurately grasp the progress of the print operation, especially when his or her desk is located far away from the printer.

SUMMARY OF THE INVENTION

It is an objective of the present invention to overcome the above problems and also to provide a print system capable of notifying a user of progress of print operations performed at a printer.

In order to achieve the above and other objectives, there is provided a print system including a terminal, a

printer controller and a printer. The terminal generates original data. The printer controller converts the original data into print data. The printer performs print operations for forming an image on a recording medium based on the print data. The printer controller is connected between the terminal and the printer. The printer includes a condition detector that detects a condition of the print operations and transmitting means for transmitting condition data indicating the condition of the print operations to at least one of the terminal and the printer controller. At least one of the terminal and the printer controller comprises receiving means for receiving the condition data. At least one of the terminal and the printer controller comprises notifying means for notifying a user of progress of the print operations based on the condition data.

There is also provided a printer controller connected between a terminal and a printer. The terminal generates original data, and the printer performs print operations based on print data for forming an image on a recording medium. The printer detects a condition of the print operations and transmits condition data indicating the condition. The printer controller includes converting means for converting the original data into the print data, receiving means for receiving the condition data from the printer, and notifying means for notifying a user of

progress of the print operations based on the condition data.

Further, there is provided a printer controller connected between a terminal and a printer. The terminal generates original data, and the printer performs print operations based on print data for forming an image on a recording medium. The printer detects a condition of the print operations and transmits condition data indicating the condition. The printer controller includes converting means for converting the original data into the print data, and relaying means for receiving the condition data from the printer and transmitting the condition data to the terminal.

Still further, there is provided a printer connected to a printer controller that converts original data received from a terminal into print data. The printer includes a print unit that performs print operations based on the print data for forming an image on a recording medium, a detector that detects a progress of the print operations, and transmitting means for transmitting progress data indicating the condition of the print operations to the printer controller.

There is also provided a print progress notifying device including counting means for counting a printed raster number, detecting means for detecting a total raster number of print data, a timer that measuring a required time duration from when print operations are started to when the

counting means counts the printed raster number, and predicting means for predicting at least one of a remaining time duration required for completing the print operations and a completion time at which the print operations are completed, based on the printed raster number, the total raster number, and the required time duration.

It should be noted that in the following description, a CPU 102 of an RIP computer 24 and programs stored in a RAM 108 together serve as the receiving means, the relaying means, the predicting means, the converting means, and the transmitting means of the printer controller. A display 21 and a display 11 serves as the notifying means. A sensor 59 or variables stored in a RAM 76 serves as the condition detector or the counting means. A CPU 72 of a printer 30 serves as the transmitting means of the printer.

DESCRIPTION OF THE DRAWINGS

The particular features and advantages of the invention as well as other objects will become more apparent from the following description taken in connection with the accompanying drawings, in which:

Fig. 1 is a schematic view showing a print system according to embodiments of the present invention;

Fig. 2 is a cross-sectional view showing a printer of the print system of Fig. 1;

Fig. 3 is a block diagram showing electric

configuration of the print system of Fig. 1;

Fig. 4 is a flowchart representing a print routine according to a first embodiment of the present invention;

Fig. 5 is a flowchart representing a print control routine according to the first embodiment;

Fig. 6 is a flowchart representing a notification routine according to the first embodiment;

Fig. 7 is a flowchart representing a print routine according to a second embodiment of the present invention;

Fig. 8 is a flowchart representing a print control routine according to the second embodiment;

Fig. 9 is a flowchart representing a notification routine according to the second embodiment; and

Fig. 10 is a schematic view showing a display screen indicating progress of printing.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Print systems according to preferred embodiments of the present invention will be described while referring to the accompanying drawings.

First, a print system PS according to the embodiments of the present invention will be described while referring to Fig. 1. The print system PS includes an information processing terminal 10, a raster image processor (RIP) 20, and a printer 30. The information processing terminal 10 is connected to the RIP 20 by a network 40, such as a local

area network (LAN). The printer 30 is connected to the RIP 20 by a line 45. The information processing terminal 10 can be a personal computer, and the printer 30 can be a printer plotter, an ink jet printer, a laser printer, or any other variety of printer.

It should be noted that the print system PS according to the present embodiment includes only a single information processing terminal 10 and a single printer 30. However, a plurality of information processing terminals 10 and a plurality of printers 30 can be included. In this case, the information processing terminals 10 are connected to the network 40, and the printers 30 are connected to the RIP 20.

Next, the information processing terminal 10 will be described while referring to Fig. 1. As shown in Fig. 1, the information processing terminal 10 includes a display 11, a mouse 12, a keyboard 13, and a computer 14. The display 11, the mouse 12, and the keyboard 13 are individually connected to the computer 14. The computer 14 is installed with variety of application software, such as word processing software, image processing software, and graphic software. The computer 14 generates original data, such as text data, TIFF image data, JPEG image data, and graphic data, using the application software based on instructions from a user. When the user inputs a print start command, the computer 14 transmits the original data over the network

40 to the RIP 20.

Next, the RIP 20 will be described while referring to Figs. 1 and 3. The RIP 20 similarly includes a display 21, a mouse 22, a keyboard 23, and an RIP computer 24. The display 21, the mouse 22, and the keyboard 23 are individually connected to the RIP computer 24.

As shown in Fig. 3, the RIP computer 24 has an electrical control circuit 102. The control circuit 102 includes a well-known logic computation circuit having a central processing unit (CPU) 104, a read-only memory (ROM) 106, a random access memory (RAM) 108, and a hard disk 109, and also includes an input/output circuit 111 and a communication circuit 112, all connected to each other by a common bus 114. The ROM 106 stores control programs. The RAM 108 stores various data, variables, and programs. The input/output circuit 111 is connected to the keyboard 23, the display 21, and the mouse 22. The communication circuit 112 is connected to the information processing terminal 10 and the printer 30.

The CPU 104 receives signals from the keyboard 23 and the mouse 22, and transmits data to the display 21 over the input/output circuit 111. Also, the CPU 104 executes transmission/reception of data between the CPU 104 and the information processing terminal 10 and between the CPU 104 the printer 30, based on these signals and on data and

programs stored in the RAM 108, the hard disk 109, and the ROM 106.

When the RIP 20 receives original data from the information processing terminal 10, the original data is temporarily stored in the hard disk 109 of the RIP 20. Then, the RIP 20 outputs a print start command to the printer 30. At the same time, the original data is decoded according to the control program, and converted into print data. Then, the print data is transmitted to the printer 30 a portion at a time in a plurality of steps. The print data may be bit map data developed in dot units, which is the basic data unit used in printing. It should be noted that when a print head 56 (described later) is used to print in both scanning directions, the print data for the return scan portion is inverted with respect to normal print data.

Next, the printer 30 will be described while referring to Figs. 2 and 3. As shown in Fig. 2, the printer 30 includes a sheet supply mechanism 32, a sheet supply roller 34, a sheet feed mechanism 50, a print head 56, a sensor 59, and a movement mechanism 60. Internal components of the printer 30 are disposed to define a sheet feed path 36 along which recording sheets 2 are transported one sheet at a time. The sheet supply mechanism 32 houses a plurality of recording sheets 2 in a stacked condition. The sheet supply roller 34 is disposed adjacent to the lower end of the sheet

supply mechanism 32 for feeding the recording sheets 2 one at a time from the sheet supply mechanism 32.

The sheet feed mechanism 50 includes a first feed roller 38 and a second feed roller 52, disposed along the transport pathway 36 in this order from the sheet supply mechanism 32. The first and second feed rollers 38, 52 feed the recording sheet 2 past the print head 56 in an auxiliary scanning direction indicated by an arrow A in Fig. 2, then discharge the recording sheet 2 out of the printer 30 through a discharge port 64.

The movement mechanism 60 is disposed above the transport pathway 36, and includes a carriage 58. The print head 56 is mounted on the carriage 58. The movement mechanism 60 controls the carriage 58 to scan in a main scanning direction perpendicular to the auxiliary scanning direction A while the print head 56 ejects ink droplets onto the recording sheet 2. The sensor 59 detects a physical position of the print head 56.

It should be noted that the printer 30 can be of the type capable of printing banners several meters wide and several tens of meters long. In this case, a roll of recording sheet is used as a recording medium, rather than a cut sheet.

As shown in Fig. 3, the printer 30 further includes an electrical control circuit 70. The control circuit 70 is a

well-known logic computation circuit including a CPU 72, a ROM 74, a RAM 76, and further includes an input/output circuit 88 and a communication circuit 80, all connected to each other by a common bus 82. The input/output circuit 88 is connected to the sheet feed mechanism 50, the print head 56, and the movement mechanism 60. The communication circuit 80 is connected to the communication circuit 112 of the RIP 20.

The CPU 72 executes overall control of the printer 30. For example, the CPU 72 receives print data from the RIP 20 over the communication circuit 80. Also, the CPU 72 controls the sheet feed mechanism 50, the print head 56, and the movement mechanism 60 so as to execute printing operations, based on the print data, other data and programs stored in the ROM 74 and the RAM 76.

When the printer 30 receives print data from the RIP 20, the print data is stored in a buffer memory (not shown) provided in the RAM 76. Then, a predetermined number of rasters' worth of print data is retrieved from the buffer memory at one time. When free space is generated in the buffer memory, the printer 30 receives subsequent print data from the RIP 20, and stores the print data into the buffer memory. These operations are repeated until print operations have been performed for all print data.

It should be noted that each raster's worth of print

data includes bit map data for driving the print head 56 to print a single dot line in single scan in the main scanning direction. Because the print head 56 is provided with a plurality of nozzles aligned in the auxiliary direction A, the print head 56 can print the plurality of raster in a single scan. In the present embodiment, the print head 56 is provided with 32 or 64 nozzles, so 32 or 64 rasters's worth of data is retrieved from the buffer memory each time.

Next, control processes according to the first embodiment of the present invention will be described while referring to the flowcharts shown in Figs. 4 to 6. The control processes include a print routine, a print control routine, and a notification routine.

First, the print routine will be described while referring to the flowchart shown in Fig. 4. The print routine is executed by the control circuit 70 of the printer 30 when any data is received from the RIP 20.

First, in S200, data received from the RIP 20 is stored in the buffer memory, and a single command is retrieved from the data in buffer memory.

Then in S210, it is determined whether or not the retrieved command is a print start initialization command. If so (S200:YES), the routine proceeds to S220, wherein a raster variable R is initialized to zero. Then, the present routine returns to S200.

On the other hand, if S210 results in a negative determination (S210:NO), then in S230, it is determined whether or not the retrieved command is a raster variable retrieve command. If not (S230:NO), then in S240, it is determined whether or not the retrieved command is a carriage return command for returning a scanning direction of the carriage 58. If not (S240:NO), this means that the retrieved command is a print data, so in S250, print operations are performed based on the print data for forming an image on the recording sheet 2. Then, the present routine returns, and repeats the processes in S200 and on.

When S240 results in an affirmative determination (S240:YES), then in S260, the raster variable R is incremented by a predetermined amount that corresponds to the number of nozzles of the print head 56, that is, 32 or 64 in the present embodiment. Next in S270, the sheet feed mechanism 50 feeds the recording sheet 2 by a distance equivalent to 32 or 64 lines. Then, the present routine returns, and repeats the processes in S200 and on. In this way, the raster variable R is incremented in S260 each time the print head 56 performs a single scan's worth of printing.

If the retrieved command is the raster variable retrieve command (S230:YES), then the present routine proceeds to S280, wherein the raster variable R is transmitted to the RIP 20. Then, the process returns, and

repeats processes in S200 and on.

Next, the print control routine will be described while referring to the flowchart shown in Fig. 5. The print control routine is executed by the CPU 104 of the RIP 20 when a print start command is received from the information processing terminal 10.

First in S300, the RIP 20 stores the present time as a start time Ta in the RAM 108. Next in S310, a print start initialization command is transmitted to the printer 30. Then in S320, it is determined whether or not the raster variable R has been requested. If not (S320:NO), then in S330, print data is transmitted to the printer 30. Then in S340, it is determined whether or not all print data has been transmitted to the printer 30. If so, the routine is temporarily ended. On the other hand, if not (S340:NO), the routine returns to S320. In this way, the print data is transmitted from the RIP 20 to the printer 30 in a portion at a time in a plurality of steps. This enables storing a subsequent portion of the print data in the buffer memory of the printer 30 when a free space is generated in the buffer memory.

If it is determined, in S320, that the raster variable R has been requested (S320:YES), then in S350, the raster variable retrieve command is transmitted to the printer 30. Next in S360, the present time is stored as a current time

Tb in the RAM 108, and in S370, the raster variable R is received from the printer 30. Afterwards, the routine proceeds to S330.

5 Next, the notification routine will be described while referring to the flowchart of Fig. 6. The notification routine is executed by the CPU 104 of the RIP 20 for notifying a user of an expected print completion time. The notification routine is repeatedly executed at a predetermined time interval or when requested by the user through the keyboard 23.

10 First in S400, the raster variable R is requested. In response to this request, the raster variable R is received from the printer 30 by the printer control routine as described above. Next, in S410, the process start time Ta, the present time Tb, and the raster variable R are retrieved. Then in S420, an expected print completion time is calculated using the formula:

Print completion time = $Ta + (Tb - Ta) \times (\text{total R number}) / R$

wherein, Ta is the start time;

20 Tb is the current time;

total R number is the total number of rasters in all print data; and

R is the raster variable.

25 It should be noted that the R total is calculated by processes (not shown) when the original data is converted

into print data.

Then, in S430, the deduced print completion time is displayed on the display 21 to notify the user of the deduced print completion time. In this way, the user can grasp the print completion time. Because the print completion time is predicted based on the raster variable R regardless of the transmission of print data to the printer 30, the deduced print completion time is accurate.

It should be noted that a remaining time duration required for completing print operations can be displayed rather than the deduced print completion time. Also, the print completion time or the remaining time duration can be notified to the user audibly by a synthesized voice, rather than by display.

Also, the present invention can be applied to a print system wherein a printer is directly connected to a personal computer. In this case, the personal computer prepares original data and converts the original data into print data. The print data is then transmitted to the printer. The printer interprets the print data using a data interpreting routine stored in a RAM of the printer, and serially prints based on the print data.

Next, control processes according to a second embodiment of the present invention will be described while referring to the flowcharts shown in Figs. 7 to 9. The

control processes include a print routine, a print control routine, and a notification routine.

First, the print routine will be described while referring to the flowchart shown in Fig. 7. The print routine is executed by the CPU 72 of the printer 30 when the RIP 20 outputs a print start command to the printer 30.

When the print processes are started, first in S500, a line variable L is reset to zero. Next in S510, the print operations are performed for forming an image on a recording sheet 2 based on print data received from the RIP 20. During the print operations, the print head 56 is scanned in the main scanning direction while the recording sheet 2 is fed in the auxiliary scanning direction A.

Next in S520, the line variable L is incremented by the number of lines that have been printed in S520. Specifically, the sensor 59 detects the physical position of the print head 56, and the number of times the print head 56 has scanned is detected. Then, the number of printed lines is calculated using the detection result.

Next in S530, it is determined whether or not an inquiry signal has been received from the RIP 20. If so (S530:YES), then in S540, the line variable L, that is, the number of printed lines, is notified to the RIP 20. Then, the present routine proceeds to S550. On the other hand, if no inquiry signal has been received (S530:NO), the present

routine proceeds directly to S550.

5 In S550, it is determined whether or not the print operations have been completed for all print data transmitted from the RIP 20. If so (S550:YES), then in S560, a print completion signal indicating that the printing has been completed is transmitted to the RIP 20. Then, the present routine is ended. On the other hand, if it is determined that the print operations have not been completed (S550:NO), then the present routine returns to S510.

10 Next, the print control routine will be described while referring to the flowchart shown in Fig. 8. The print control routine is executed by the CPU 104 of the RIP computer 24 based on the program stored in the RAM 108. The print control processes are started when a print start command is received from the information processing terminal 10.

15 First in S600, a print start command is transmitted to the printer 30. Next in S610, original data received from the information processing terminal 10 is converted into print data. Then, in S620, the print data is serially transmitted to the printer 30 in synchronization with the progress of print operations in the printer 30. It is unnecessary that all print data be transmitted at one time.

20 Next in S630, the RIP 20 transmits an inquiry signal to the printer 30 for requesting the printer 30 to transmit

25

the line variable L, and in S640, the RIP 20 receives the line variable L from the printer 30. Then in S650, the notification routine is executed for notifying the user of progress of the print operations based on the received line variable L. The notification routine will be described later in more detail.

Next in S660, it is determined whether or not the print completion signal has been received from the printer 30. If so (S660:YES), then the present routine is ended. On the other hand, if the print completion signal has not been received (S660:NO), then the present routine proceeds to S670. In S670, it is determined whether or not all print data has been transmitted to the printer 30. If so (S670:YES), then the present routine returns to S630 because there is no need to transmit any more print data. On the other hand, if not (S670:NO), the present routine returns to S620 to transmit remaining print data.

Next, the notification routine executed in S650 in Fig. 8 will be described while referring to the flowchart shown in Fig. 9. First in S700, it is determined whether or not print operations have just been started. That is, it is determined whether or not the present routine is executed for the first time during the print control routine shown in Fig. 8. If so, (S700:YES), then in S710, a current line variable CL, a previous line variable PL, and a difference

669230"452E3E60

variable DC are all reset to zero. It should be noted that the current line variable CL, the previous line variable PL, and the difference variable DC are stored in the RAM 108 of the RIP 20. Next in S720, the total amount of the print data is calculated based on the amount of print data which has been generated in S610 of Fig. 8. The total amount of the print data indicates the number of lines to be printed by the printer 30. Then, the present routine proceeds to S730. On the other hand, if it is determined in S700 that the print operations have not been just started (S700:NO), then the present routine proceeds directly to S730.

In S730, the current line variable CL is set to the line variable L received from the printer 30 in S640. Next in S740, a line difference D between the current line variable CL and the previous line variable PL is obtained by calculation. Then in S750, it is determined whether or not the line difference D is zero. If not (S750:NO), then in S760, the difference variable DC is set to zero. Then in S810, message data representing a message "Print operations are being properly performed" is set as a message variable MSG. Then, the present routine proceeds to S820.

On the other hand, if the line difference D equals to zero (S750:YES), this means that the print speed is zero, and the present routine proceeds to S770. In S770, the difference variable DC is incremented by 1. Then in S780,

it is determined whether or not the difference variable DC is greater than ten. If so (S780:YES), then in S800, data representing a message "Head has stopped moving" is set as the message variable MSG. Then, the present routine proceeds to S820. On the other hand, if the difference variable DC is ten or less (S780:NO), then in S790, data indicating a message "Print speed has decreased" is set as the message variable MSG. Then, the present routine proceeds to S820.

In S820, a message based on the message variable MSG is displayed on the display 21 of the RIP 20. Fig. 10 shows a representative display screen of the display 21. As shown in Fig. 10, the display screen includes regions A, B, C. The message corresponding to the message variable MSG is displayed in the region B. Next in S830, a progress condition graph is displayed in the region A based on the total amount of the print data and the current line variable CL. The progress condition graph shows total amount of the print data divided into a printed amount region and an unprinted amount region.

Next in S840, the previous line variable PL is set to the current line variable CL, and the present routine returns.

As described above, according to the present embodiment, the print system SY can notify the user of the

progress of the print operations based on various data from the printer 30. Therefore, the user can more accurately grasp the progress of print operations.

Also, because the printer 30 transmits the printed line variable L indicating the number of printed lines only when it receives the inquiry signal from the RIP 20, the RIP 20 can manage transmission of the notifying signals from the printers even when a plurality of printers are connected to the RIP 20. That is, the transmission timing of the notifying signals from different printers will not overlap.

The RIP 20 notifies the user of the progress of print operations by displaying the progress condition graph. Also, the RIP 20 notifies the user of whether the print operations are being properly executed or not. Therefore, the user can easily grasp the progress of the print operations without personally checking on the printer or making any determinations.

In the above-described second embodiment, the RIP 20 transmits the inquiry signal to the printer 30 at a predetermined timing. However, the RIP 20 can transmit the inquiry signal only when a request command is inputted by the user through the mouse 22 or the keyboard 23. For example, an update button can be displayed in the region C on the display screen of Fig. 10. The user can click on the update button using the mouse 22. With this configuration,

the user can update the progress condition graph at a desired timing. In this case, because the printer 30 executes the above-described controls only when requested, the burden on the printer 30 will be lightened.

5 Also, the progress of print operations can be displayed on the display 11 of the information processing terminal 10 rather than on the display 21. In this case, instead of displaying a message and a graph in S820 and S830, the RIP 20 transmits the total amount of print data and the line variable L to the information processing terminal 10. Then, the information processing terminal 10 executes the processes of S820 and S830 shown in Fig. 9, thereby displaying a message and a graph on the display 11.

10 Also, the RIP 20 can notify the user of the progress of print operations using a graph different from the graph shown in Fig. 10. For example, the total amount of print data, the amount of printed print data, and the amount of unprinted print data can be displayed in graphs aligned with each other or can be displayed in graphs with line numbers.

15 Also, percentage from 0 to 100 percent can be displayed with the graphs so that the user can more easily grasp what percentages has already been printed and what percentage still remains unprinted. Alternatively, a percentage ratio of printed amount or unprinted amount to total amount can be displayed. If print speed is known, the amount of time

20

25

required for printing remaining print data can be displayed also.

Moreover, although in the above-described embodiments, the printer 30 detects the number of printed lines using the sensor 59, the number of printed lines can be calculated using software which calculates printed amount by detecting each time a single scan's worth of print data is supplied to the print head 56. Alternatively, the printed amount can be calculated by detecting a sheet feed amount using software or hardware, such as a sensor. However, when software is used, a time lag can be generated between the actual print timing and the detected timing. Therefore, the number of printed lines can be more accurately obtained by using the hardware.

Further, the progress of print processes can be notified audibly using a synthesized voice.

Also, the number of printed lines can be displayed in a message saying, for example, "Presently 100 lines have been printed". The user can use this information based on his or her past experience to determine, for example, that printing will be ended at about 200 lines, so printing is about half completed. However, in this case, the user cannot know the exact total amount of print data merely by knowing the printed amount. Therefore, the user personally needs to determine about how many lines will be printed in

total.

Using the number of lines, any two of total data amount, printed amount, and unprinted amount can be displayed and comparison between these two can also be displayed. For example, the total data amount and the printed amount can be displayed side by side or in a graph-form overlapping each other. Using this manner of display, the user can judge how much printing has been completed. Alternatively, by displaying a percentage ratio of printed amount with respect to the total data amount, the user can grasp how much printing has been completed without judging by himself/herself.

Moreover, how much time remains before printing is completed can be determined based on unprinted amount and print speed, and the determined time is notified to the user. With this configuration, the user will not need to personally determine how much time is required until the printing is completed. Therefore, it is very convenient for the user.

While the invention has been described in detail with reference to specific embodiments thereof, it would be apparent to those skilled in the art that various changes and modifications may be made therein without departing from the spirit of the invention, the scope of which is defined by the attached claims.

What is claimed is:

1. A print system comprising:

a terminal that generates original data;

5 a printer controller that converts the original data into print data; and

a printer that performs print operations for forming an image on a recording medium based on the print data, wherein the printer controller is connected between the terminal and the printer,

10 wherein the printer comprises a condition detector that detects a condition of the print operations and transmitting means for transmitting condition data indicating the condition of the print operations to at least one of the terminal and the printer controller;

15 at least one of the terminal and the printer controller comprises receiving means for receiving the condition data; and

20 at least one of the terminal and the printer controller comprises notifying means for notifying a user of progress of the print operations based on the condition data.

25 2. The print system according to claim 1, wherein the printer further comprises a print head that forms an image on a line basis on the recording medium while scanning in a predetermined direction, wherein the condition detector detects a number of printed lines which have been printed by

the print head as the condition of the print operations.

3. The print system according to claim 1, wherein the printer controller further comprises transmitting means for transmitting a request signal to the printer, the request
5 signal requesting the printer to transmit the condition data, wherein in response to the request signal, the condition detector detects the condition of the print operations, and the transmitting means of the printer transmits the condition data to the receiving means.

10 4. The print system according to claim 3, wherein the transmitting means of the printer controller transmits the request signal when requested by a user.

15 5. The print system according to claim 3, wherein the transmitting means of the printer controller transmits the request signal at a predetermined timing.

20 6. The print system according to claim 1, wherein the printer controller further comprises calculating means for calculating a total amount of the print data, and the notifying means notifies a user of the progress of print operations based on the condition data and the total amount of the print data.

25 7. The print system according to claim 1, wherein at least one of the terminal and the printer controller further comprises speed detecting means for detecting a print speed based on the condition data received a plurality of times at

different timings from the transmitting means of the printer, wherein the notifying means notifies a user of the progress of the print operations based further on the print speed.

8. The print system according to claim 7, wherein at least one of the terminal and the printer controller further comprises state detecting means for detecting a state of the print operations based on the print speed, the state detecting means detecting whether the print operations are in a proper state, a slowed down state or a stopped state, and the notifying means further notifies the user of the state of the print operations.

9. The print system according to claim 1, wherein the printer controller further comprises calculating means for calculating a total amount of the print data, and at least one of the terminal and the printer controller further comprises speed detecting means for detecting a print speed based on the condition data received a plurality of times at different timings from the printer, wherein the notifying means notifies a user of the progress of the print operations based on the total amount of the print data and the print speed.

10. The print system according to claim 1, wherein the printer controller further comprises calculating means for calculating a total data amount of the print data, and at least one of the terminal and the printer controller

further comprises a timer that measures a required time duration from when the print operations are started to when the receiving means receives the condition data, and predicting means for predicting a remaining time duration required for the printer to complete the print operations,

5 wherein the condition detector comprises a raster counter that counts a printed raster number;

the transmitting means of the printer transmits the condition data indicating the printed raster number as the condition of the print operations;

10 the predicting means predicts the remaining time duration based on the total data amount, the required time duration, and the condition data; and

the notifying means notifies a user of the remaining time duration as the progress of the print operations.

15 11. The print system according to claim 1, wherein the printer controller further comprises calculating means for calculating a total data amount of the print data, a timer that measures a required time duration from when the print operations are started to when the condition data is received, and time predicting means for predicting a completion time at which the print operations are completed, wherein

20 the condition detector comprises a raster counter that counts a printed raster number;

the transmitting means of the printer transmits the condition data indicating the printed raster number as the condition of the print operations;

the time predicting means predicts the completion time based on the total data amount, the required time duration, and the condition data; and

the notifying means notifies the user of the completion time as the progress of the print operations.

12. The print system according to claim 1, wherein the notifying means comprises a display that visually displays the progress of the print operations.

13. The print system according to claim 1, wherein the notifying means audibly notifies the user of the progress of the print operations using synthesized voice.

14. The print system according to claim 1, wherein the printer controller is a raster image processor.

15. A printer controller connected between a terminal and a printer, the terminal generating original data, the printer performing print operations based on print data for forming an image on a recording medium, the printer detecting a condition of the print operations and transmitting condition data indicating the condition, the printer controller comprising:

converting means for converting the original data into the print data;

receiving means for receiving the condition data from the printer; and

notifying means for notifying a user of progress of the print operations based on the condition data.

5 16. A printer controller connected between a terminal and a printer, the terminal generating original data, the printer performing print operations based on print data for forming an image on a recording medium, the printer detecting a condition of the print operations and transmitting condition data indicating the condition, the printer controller comprising;

10 converting means for converting the original data into the print data; and

15 relaying means for receiving the condition data from the printer and transmitting the condition data to the terminal.

17. A printer connected to a printer controller that converts original data received from a terminal into print data, the printer comprising:

20 a print unit that performs print operations based on the print data for forming an image on a recording medium;

 a detector that detects a progress of the print operations; and

25 transmitting means for transmitting progress data indicating the condition of the print operations to the

printer controller.

18. A print progress notifying device comprising:

counting means for counting a printed raster number;

detecting means for detecting a total raster number of

5 print data;

a timer that measuring a required time duration from when print operations are started to when the counting means counts the printed raster number; and .

10 predicting means for predicting at least one of a remaining time duration required for completing the print operations and a completion time at which the print operations are completed, based on the printed raster number, the total raster number, and the required time duration.

15 19. The print progress notifying device according to claim 18 further comprising a printer for performing the print operations and a computer that is connected to the printer, wherein the raster counter is provided to the printer, and the timer and the predicting means are provided to the computer.

20

ABSTRACT OF DISCLOSURE

A RIP 20 calculates total line number of print data when converting original data to the print data. When a printer 30 is requested by the RIP to send a printed line number, the printer 30 detects the physical position of a print head 56 using a sensor 59, calculates a printed line number, and transmits the obtained printed line number to the RIP 20. The RIP 20 notifies a user of progress of print operations based on the total line number and the received printed line number.

659280"4526860

Fig. 1

PS
↙

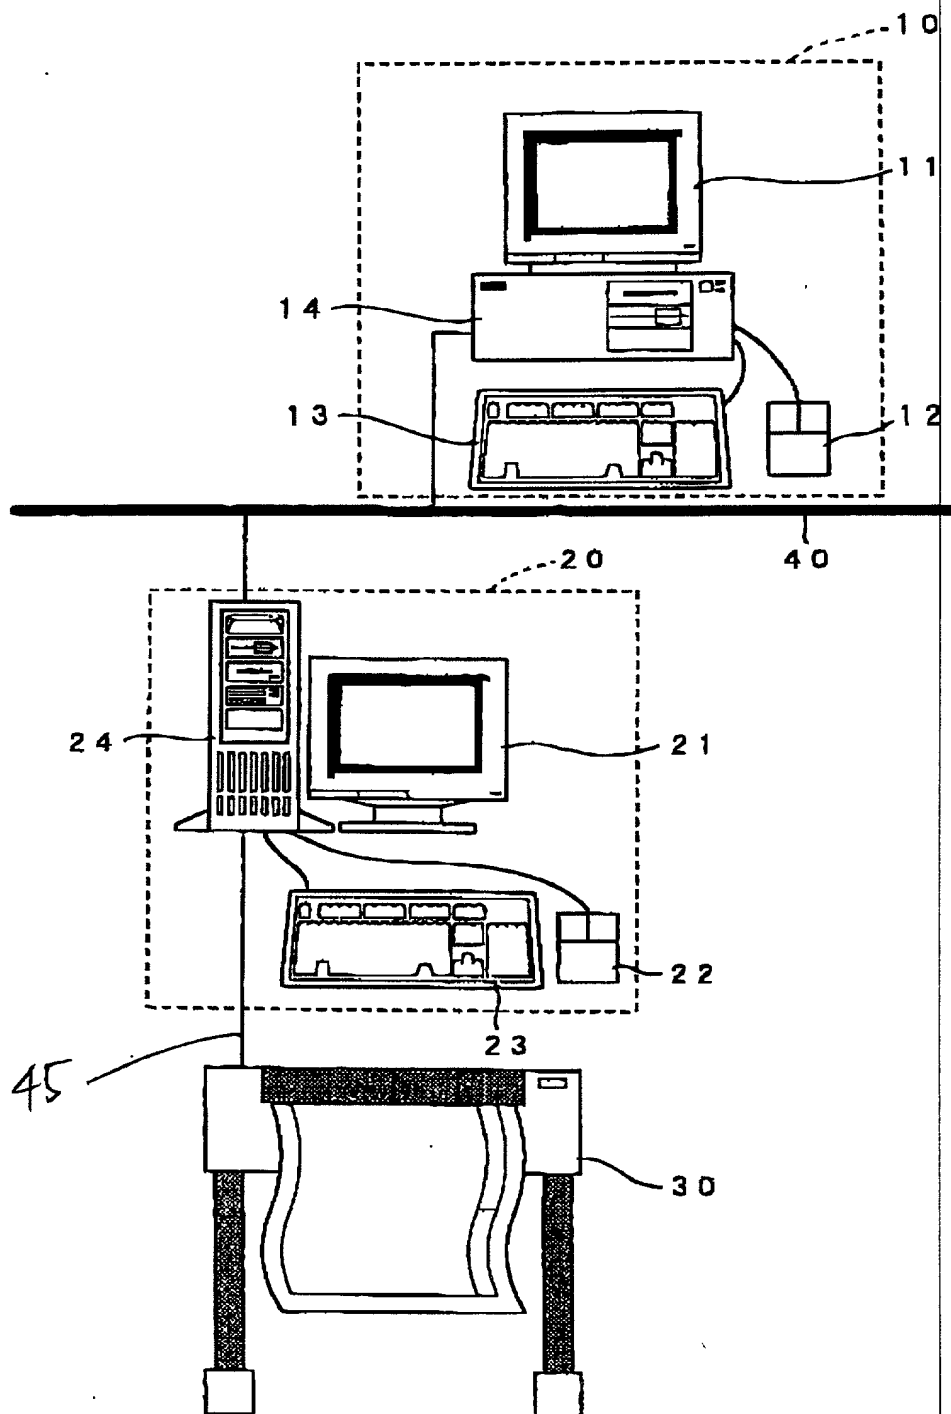


Fig. 2



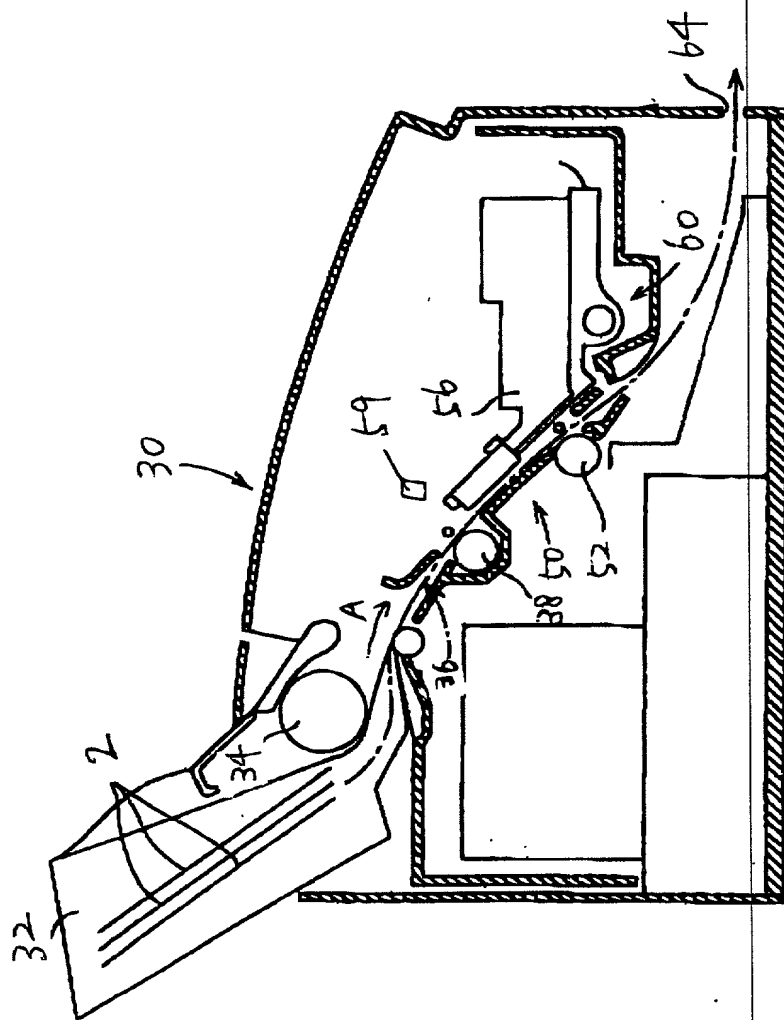


Fig. 3

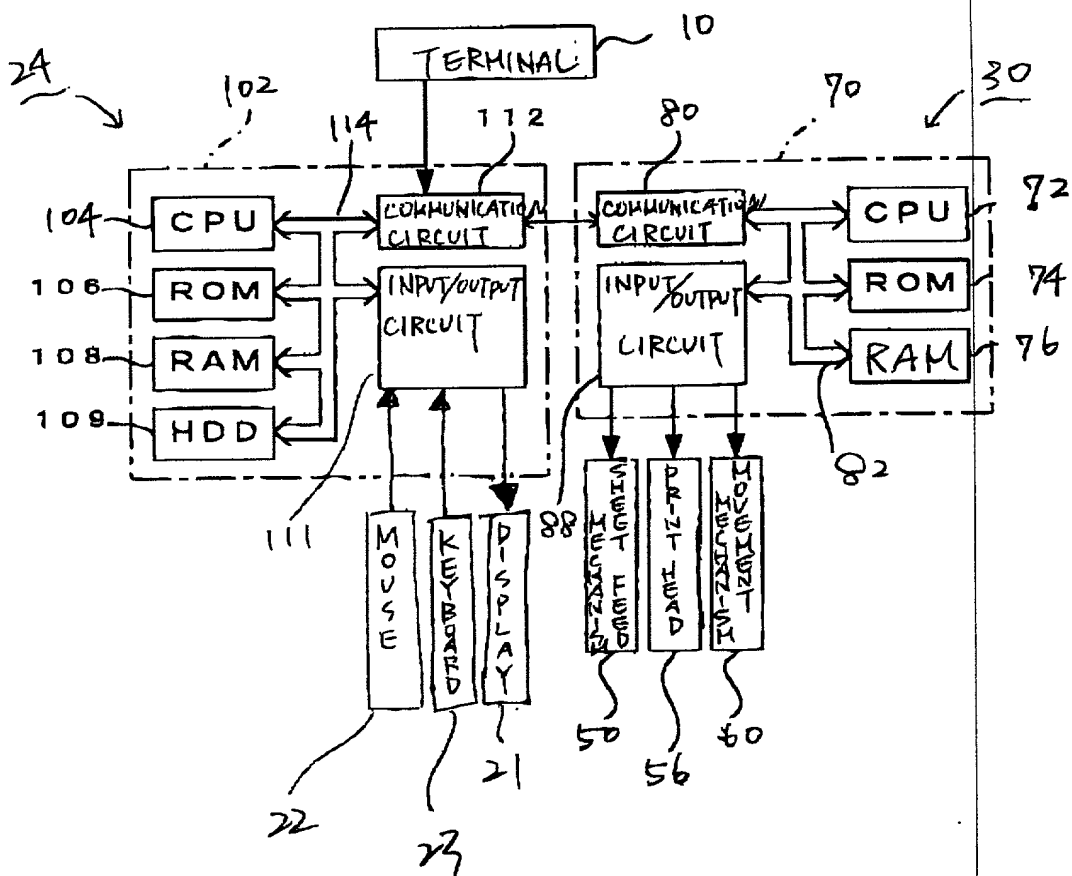


669280-452E8E60

Fig. 4

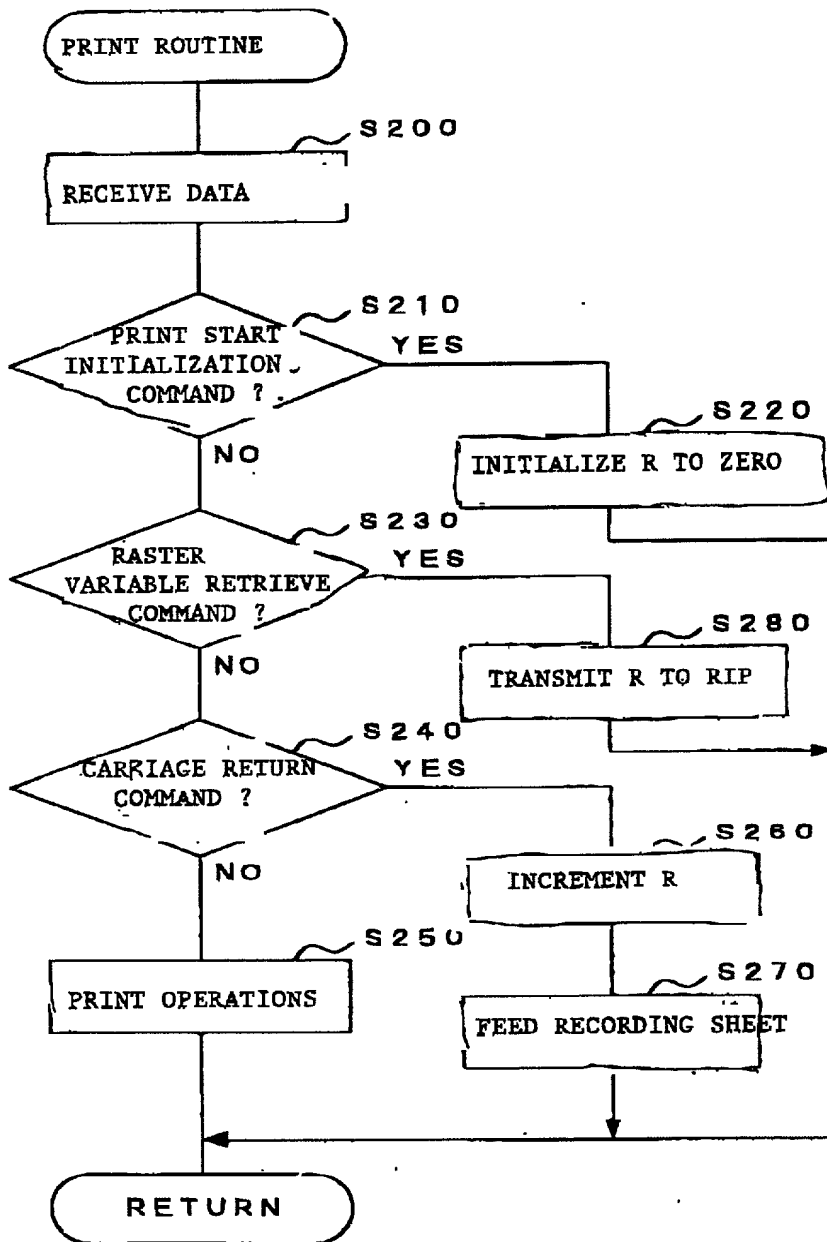

669280"4328860

Fig. 5

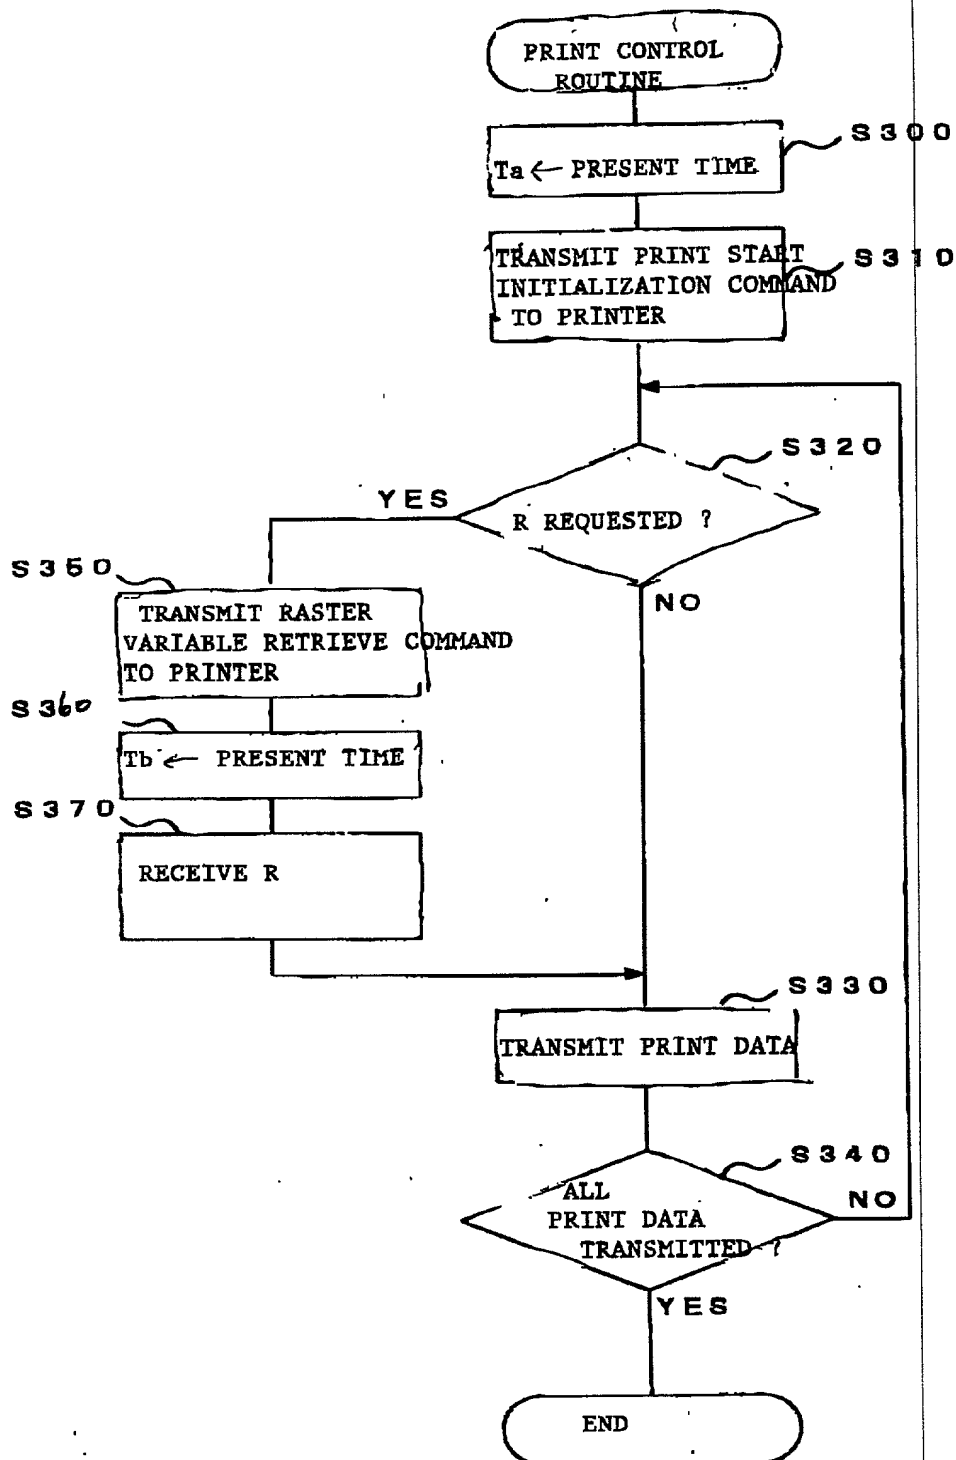

0933754 032693

Fig. 6



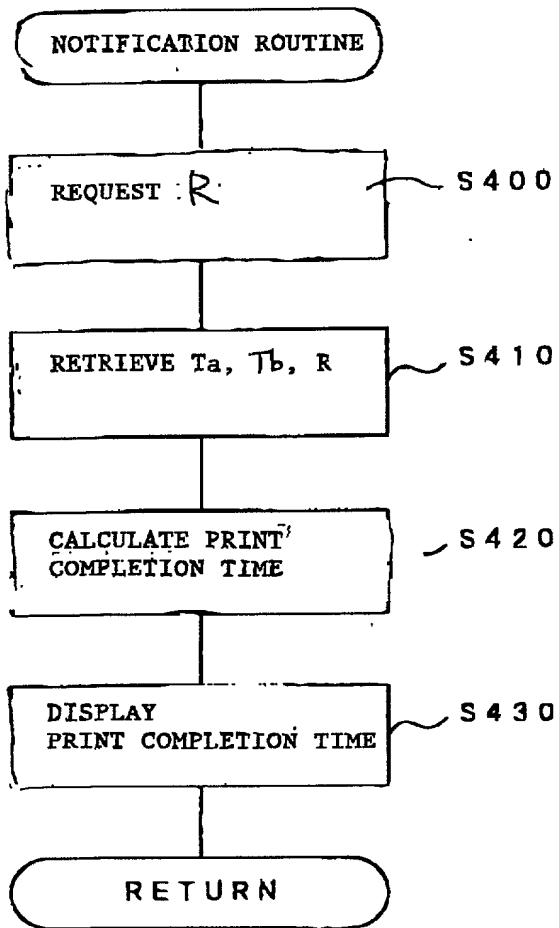


Figure 1 consists of 12 bar charts, labeled (a) through (l), each representing a different fish species. The y-axis for all charts is 'Percentage of total catch' ranging from 0 to 100. The x-axis for all charts is 'Year' from 1990 to 2001. The species and their corresponding data are as follows:

- (a) Atlantic croaker: Data points range from approximately 10% to 30%.
- (b) Striped bass: Data points range from approximately 10% to 30%.
- (c) Weakfish: Data points range from approximately 10% to 30%.
- (d) Spot: Data points range from approximately 10% to 30%.
- (e) Blue crab: Data points range from approximately 10% to 30%.
- (f) Rockfish: Data points range from approximately 10% to 30%.
- (g) Atlantic silverside: Data points range from approximately 10% to 30%.
- (h) Atlantic herring: Data points range from approximately 10% to 30%.
- (i) Atlantic menhaden: Data points range from approximately 10% to 30%.
- (j) Atlantic bluefish: Data points range from approximately 10% to 30%.
- (k) Atlantic tomcod: Data points range from approximately 10% to 30%.
- (l) Atlantic sand lance: Data points range from approximately 10% to 30%.

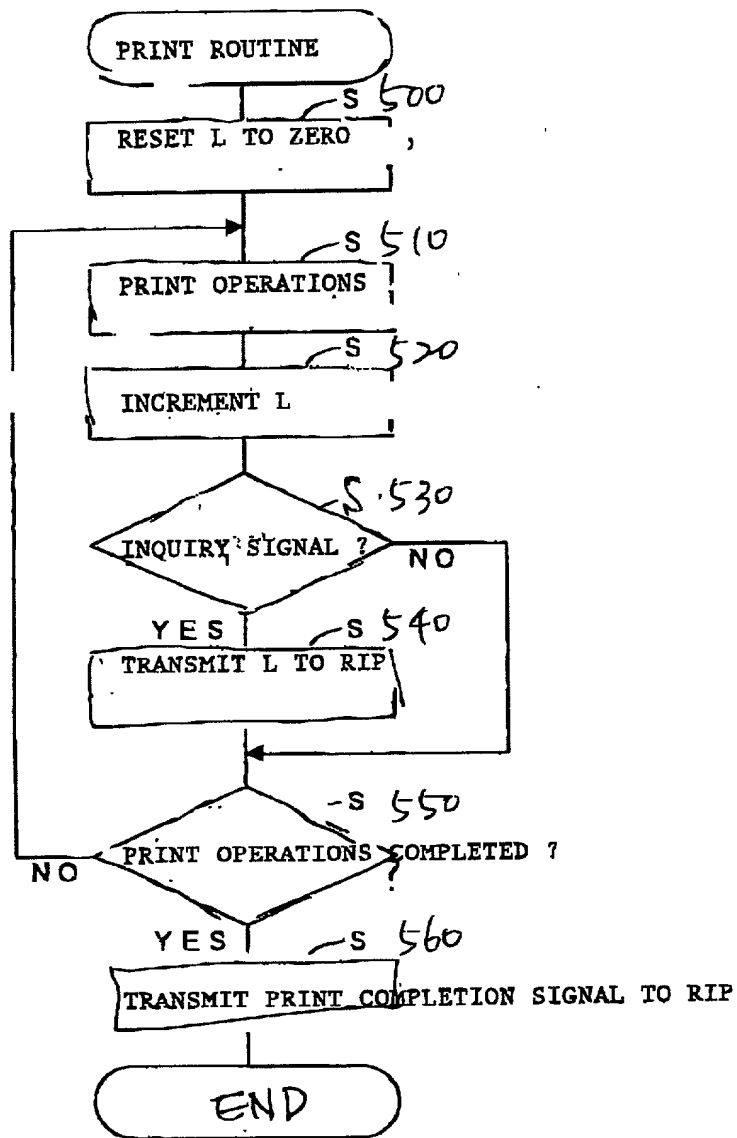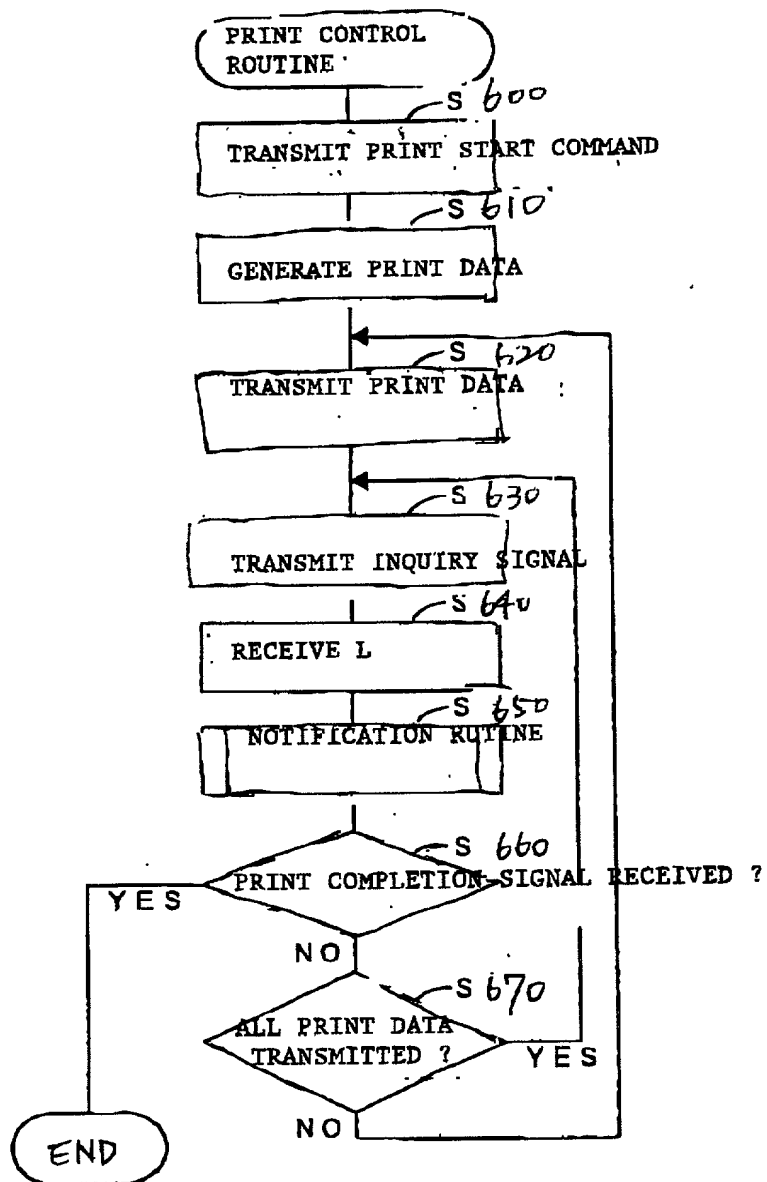

[illegible]

Abstract


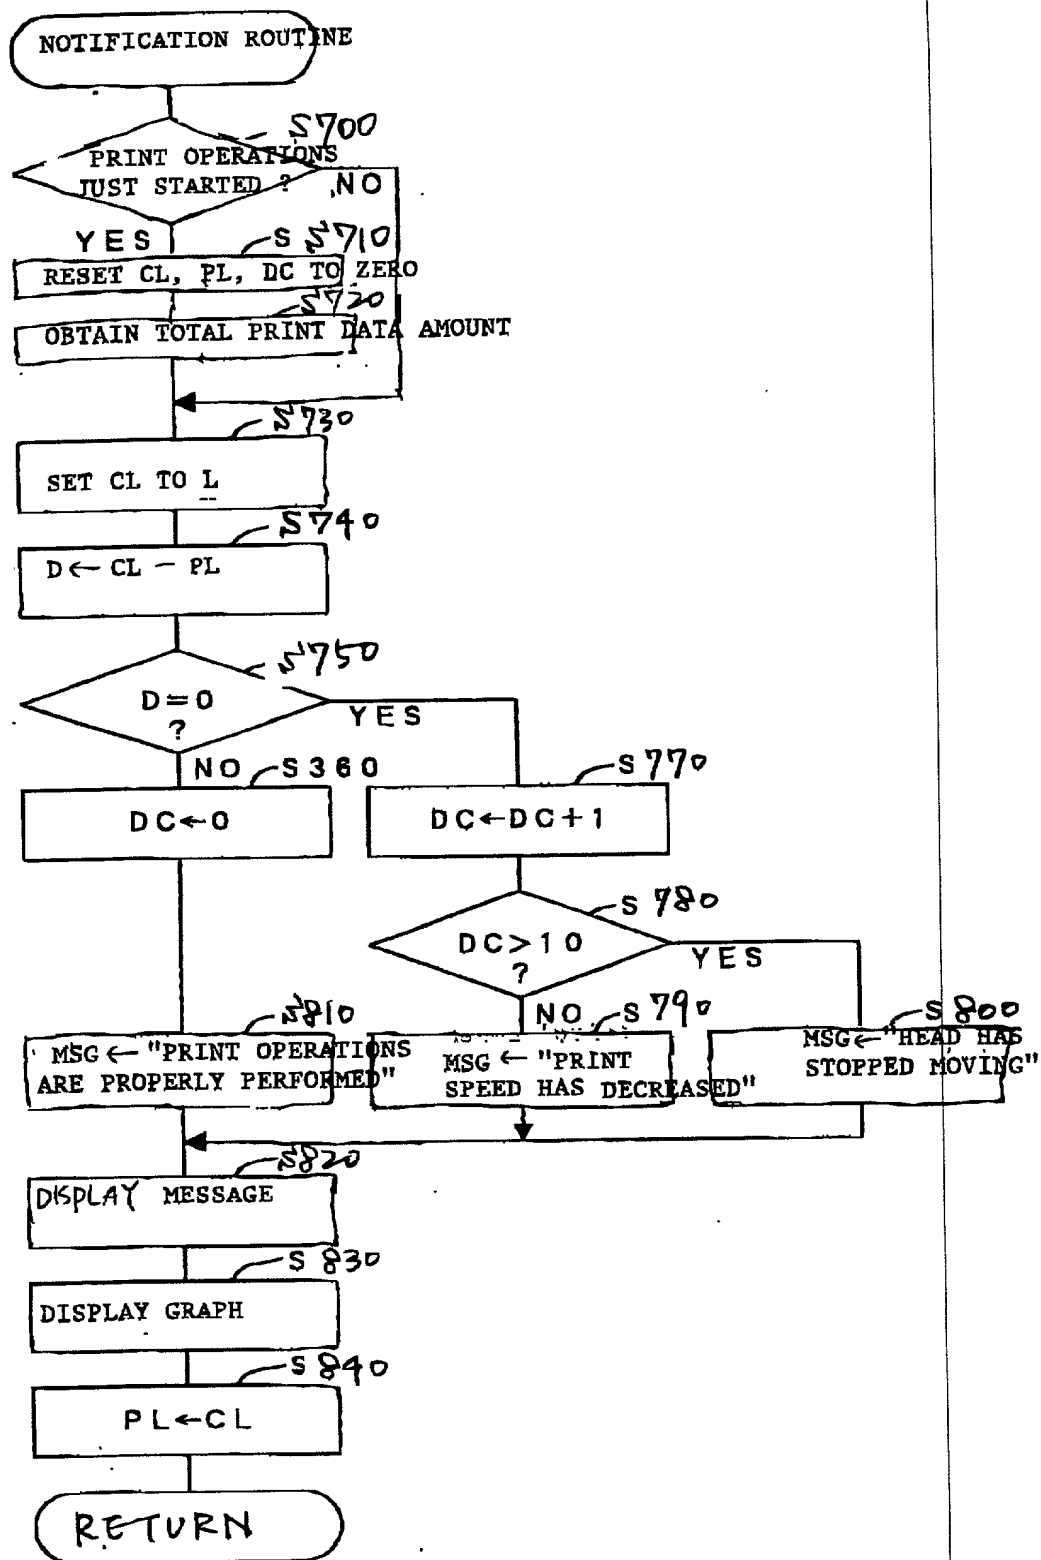


Fig. 10

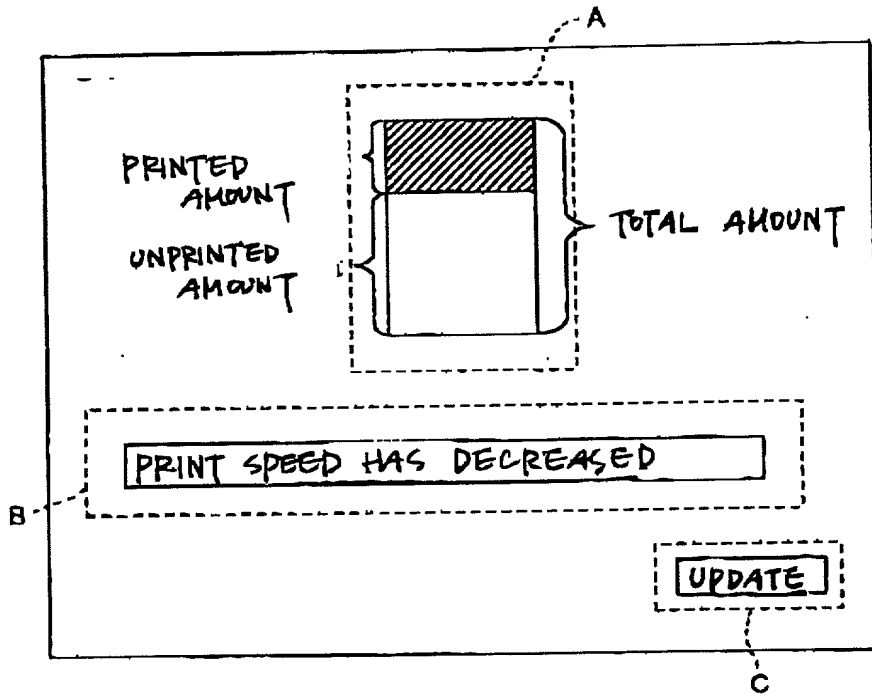

09383754.08259
659280.4578860

Declaration and Power of Attorney for Patent Application

特許出願宣言書兼委任状

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PRINT SYSTEM CAPABLE OF INFORM USER OF PROGRESS OF PRINT OPERATIONS

その明細書を
(該当するものにチェック)
(X) ここに添付する。

() 年 月 日

出願番号第 として出願され、

年 月 日補正し、
(該当する場合)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦規則法典第37章第1条第56項に従い、本願の特許性の有無について重要な情報を開示すべき義務を有することを認める。

私は、合衆国法典第35章第119条に基づく下記の外国特許出願または発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願または発明者証出願および/または米国仮出願を以下に明記する：

the specification of which
(check one)
(X) is attached hereto.

() was filed on as

Application Serial No.

and was amended on
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior foreign and/or provisional applications 先行外国出願/仮出願			Priority claimed 優先権の主張	
HEI-10-240181 (Number/番号)	Japan (Country/国名)	26/August/1998 (Day/Month/Year Filed/出願年月日)	(x) (Yes/はい)	() (No/いいえ)
HEI-10-264780 (Number/番号)	Japan (Country/国名)	18/September/1998 (Day/Month/Year Filed/出願年月日)	(x) (Yes/はい)	() (No/いいえ)
(Number/番号)	(Country/国名)	(Day/Month/Year Filed/出願年月日)	() (Yes/はい)	() (No/いいえ)
(Number/番号)	(Country/国名)	(Day/Month/Year Filed/出願年月日)	() (Yes/はい)	() (No/いいえ)

私は、合衆国法典第35章第120条に基づく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35章第112条第1項に規定の態様で先の合衆国出願に開示されていない限度において、先の出願の出願日と本願の国内出願日またはPCT国際出願日の間に公表された連邦規則法典第37章第1条第56項に記載の所収の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
現状: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18章第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

09383754-032699

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手續を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。（代理人氏名および登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Joseph C. Sullivan, Reg. No. 18,720; John Kurucz, Reg. No. 18,688;
Gerald Levy, Reg. No. 24,419; Joseph T. Eisele, Reg. No. 25,331;
Ronald R. Santucci, Reg. No. 28,988; William H. Dippert, Reg. No. 26,723;
Tiberiu Weisz, Reg. No. 29,876; Ronald E. Brown, Reg. No. 32,200;
John Gulbin, Reg. No. 33,180 and Richard J. Danyko, Reg. No. 33,672.

Send Correspondence To/書類送付先:

Gerald Levy, Esq.
KANE, DALSIMER, SULLIVAN, KURUCZ,
LEVY, EISELE AND RICHARD
711 Third Avenue
New York, New York 10017-4059
USA
Telephone: (212) 687-6000

Direct Telephone Calls To (name and telephone number)/直通電話連絡先(名称および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名 Keiji MIYAKE	
Inventor's signature/発明者の署名 <i>Keiji Miyake</i>	Date/日付 20 / Aug / 1999
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	
Full name of second joint inventor (if any)/第二共同発明者の氏名(該当する場合) Kiyoji MURAMATSU	
Second inventor's signature/第二発明者の署名 <i>Kiyoji Muramatsu</i>	Date/日付 20 / Aug / 1999
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便宛先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	

Supply similar information and signature for third and subsequent joint inventors.
第三又はそれ以降の共同発明者に対しても同様な情報および署名を提供すること。

0933754 082659